
HM628128A Series

131,072-word $\times$ 8-bit High Speed CMOS Static RAM

HITACHI

Description

The Hitachi HM628128A is a CMOS static RAM organized 128-kword $\times$ 8-bit. It realizes higher density, higher performance and low power consumption by employing 0.8 μ m Hi-CMOS process technology. It offers low power standby power dissipation; therefore, it is suitable for battery backup systems. The device, packaged in a 525-mil SOP (460-mil body SOP) or a 600-mil plastic DIP, or a 8 $\times$ 20 mm TSOP with thickness of 1.2 mm, is available for high density mounting. TSOP package is suitable for cards, and reverse type TSOP is also provided.

Features


- High speed
 - Fast access time: 55/70/85/100 ns (max)
- Low power
 - Active: 75 mW (typ)
 - Standby: 10 μ W (typ)
- Single 5 V supply
- Completely static memory
 - No clock or timing strobe required
- Equal access and cycle times
- Common data input and output
 - Three state output
- Directly TTL compatible
 - All inputs and outputs
- Capability of battery backup operation
 - 2 chip selection for battery backup

HM628128A Series

Ordering Information

Type No.	Access Time	Package
HM628128ALP-5	55 ns	600-mil 32-pin plastic DIP (DP-32)
HM628128ALP-7	70 ns	
HM628128ALP-8	85 ns	
HM628128ALP-10	100 ns	
HM628128ALP-5SL	55 ns	
HM628128ALP-7SL	70 ns	
HM628128ALP-8SL	85 ns	
HM628128ALP-10SL	100 ns	
HM628128ALFP-5	55 ns	525-mil 32-pin plastic SOP (FP-32D)
HM628128ALFP-7	70 ns	
HM628128ALFP-8	85 ns	
HM628128ALFP-10	100 ns	
HM628128ALFP-5SL	55 ns	
HM628128ALFP-7SL	70 ns	
HM628128ALFP-8SL	85 ns	
HM628128ALFP-10SL	100 ns	
HM628128ALT-5	55 ns	8 mm × 20 mm 32-pin TSOP (normal type) (TFP-32D)
HM628128ALT-7	70 ns	
HM628128ALT-8	85 ns	
HM628128ALT-10	100 ns	
HM628128ALT-5SL	55 ns	
HM628128ALT-7SL	70 ns	
HM628128ALT-8SL	85 ns	
HM628128ALT-10SL	100 ns	
HM628128ALR-5	55 ns	8 mm × 20 mm 32-pin TSOP (reverse type) (TFP-32DR)
HM628128ALR-7	70 ns	
HM628128ALR-8	85 ns	
HM628128ALR-10	100 ns	
HM628128ALR-5SL	55 ns	
HM628128ALR-7SL	70 ns	
HM628128ALR-8SL	85 ns	
HM628128ALR-10SL	100 ns	


Pin Arrangement

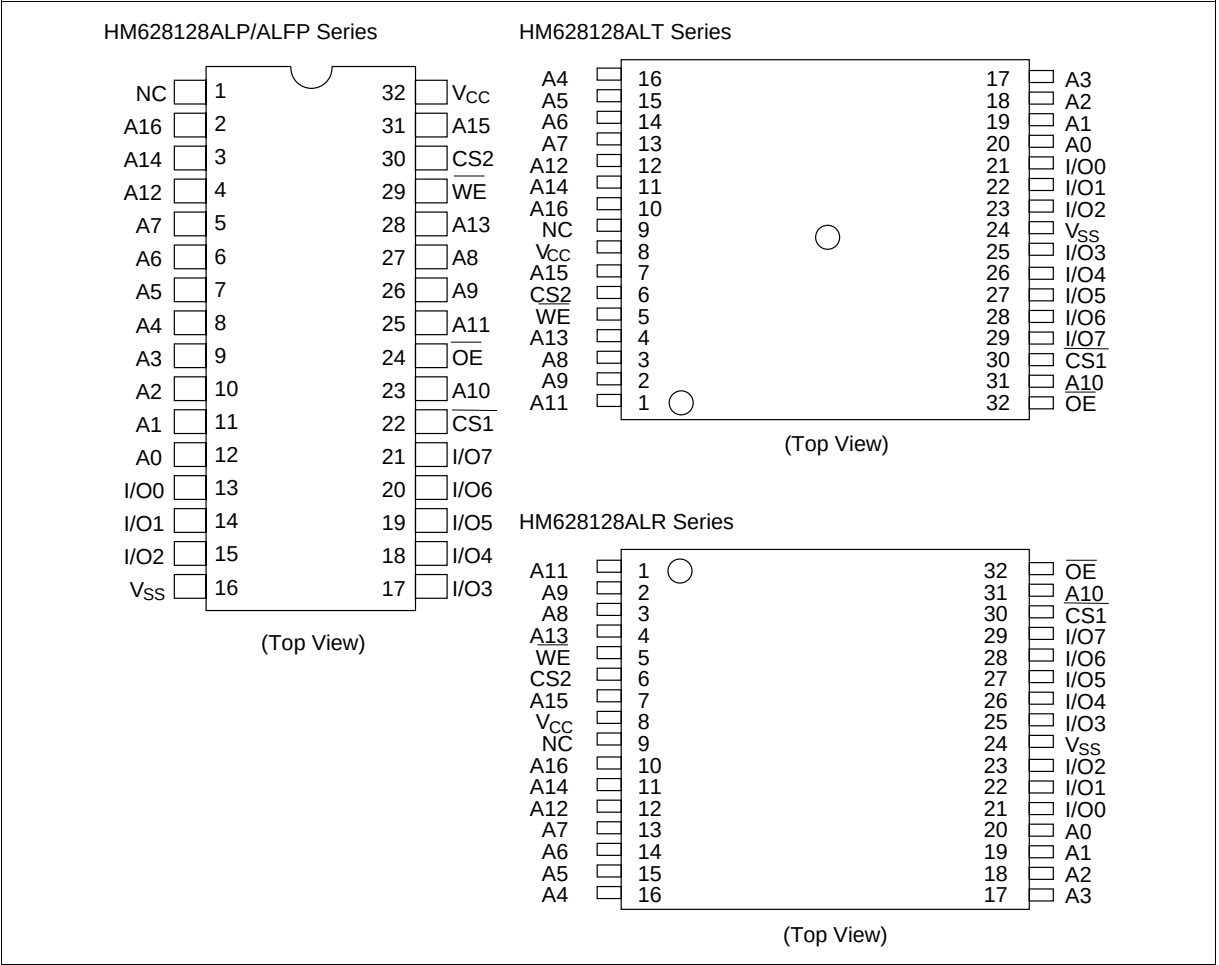

Pin Description

Pin Name	Function
A0 – A16	Address
I/O0 – I/O7	Input/output
CS1	Chip select 1
CS2	Chip select 2
WE	Write enable
OE	Output enable
NC	No connection
V _{cc}	Power supply
V _{ss}	Ground

Block Diagram

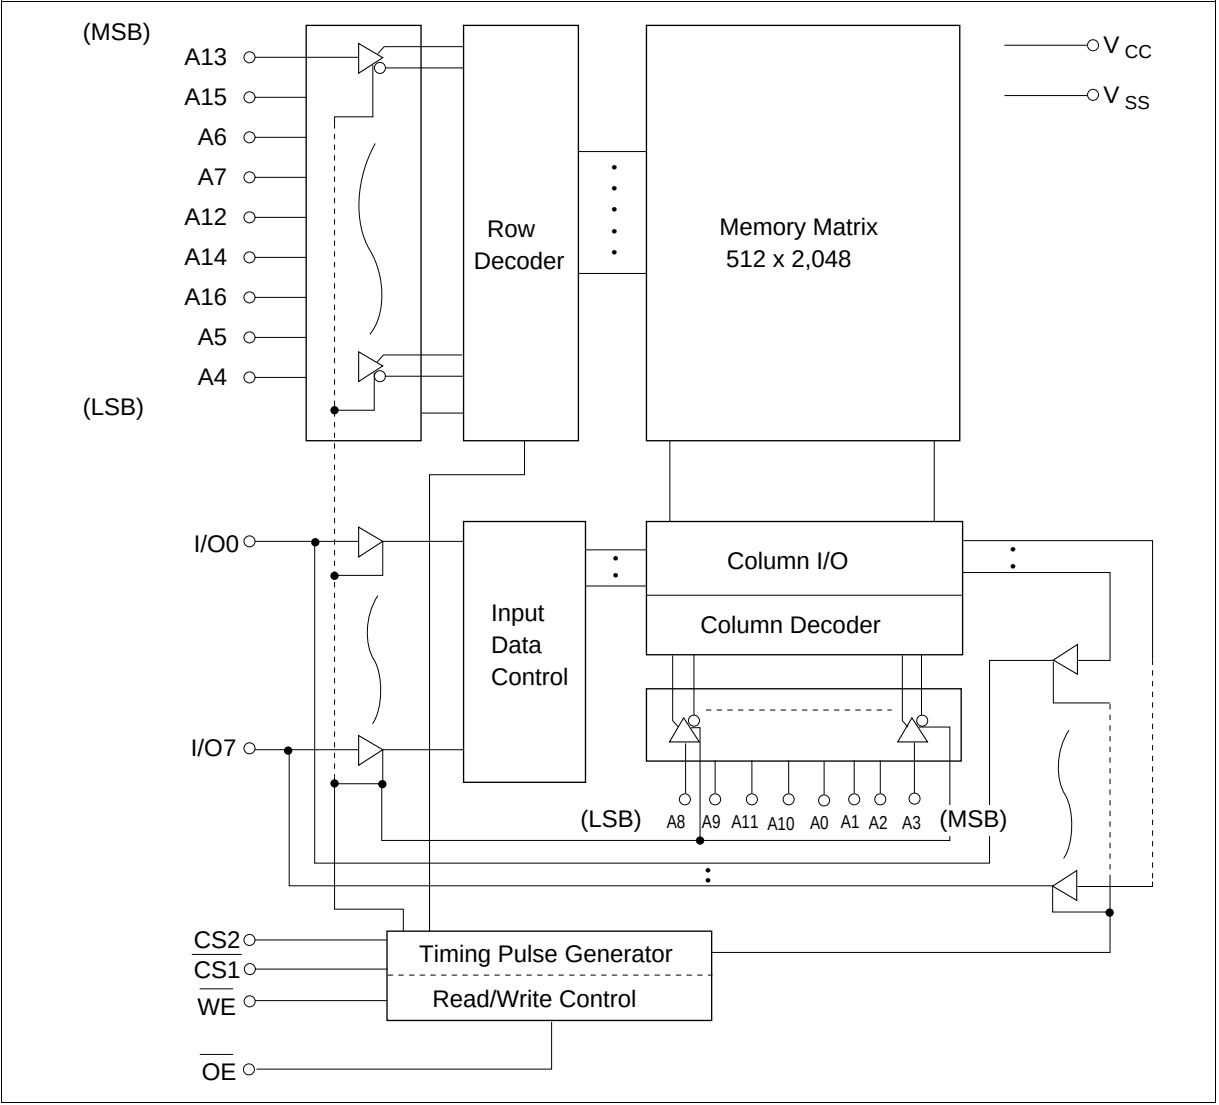

Function Table

$\overline{\text{CS1}}$	CS2	$\overline{\text{OE}}$	$\overline{\text{WE}}$	Mode	V_{CC} Current	I/O Pin	Ref. Cycle
H	X	X	X	Standby	$I_{\text{SB}}, I_{\text{SB1}}$	High-Z	—
X	L	X	X	Standby	$I_{\text{SB}}, I_{\text{SB1}}$	High-Z	—
L	H	H	H	Output disable	I_{CC}	High-Z	—
L	H	L	H	Read	I_{CC}	Dout	Read cycle
L	H	H	L	Write	I_{CC}	Din	Write cycle (1)
L	H	L	L	Write	I_{CC}	Din	Write cycle (2)

Note: X: H or L

Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Supply voltage relative to V_{SS}	V_{CC}	−0.5 to +7.0	V
Voltage on any pin relative to V_{SS} ^{*1}	V_{T}	−0.5 ^{*2} to $V_{\text{CC}} + 0.3$ ^{*3}	V
Power dissipation	P_{T}	1.0	W
Operating temperature	T_{opr}	0 to +70	°C
Storage temperature	T_{stg}	−55 to +125	°C
Storage temperature under bias	T_{bias}	−10 to +85	°C

Notes: 1. With respect to V_{SS}

2. −3.0 V for pulse half-width ≤ 30 ns

3. Maximum voltage is 7.0V.

Recommended DC Operating Conditions ($T_{\text{a}} = 0$ to +70°C)

Parameter	Symbol	Min	Typ	Max	Unit
Supply voltage	V_{CC}	4.5	5.0	5.5	V
	V_{SS}	0	0	0	V
Input voltage (HM628128A-7/8/10)	V_{IH}	2.2	—	$V_{\text{CC}} + 0.3$	V
	V_{IL}	−0.3 ^{*1}	—	0.8	V
Input voltage (HM628128A-5)	V_{IH}	2.4	—	$V_{\text{CC}} + 0.3$	V
	V_{IL}	−0.3 ^{*1}	—	0.8	V

Note: 1. −3.0 V for pulse half-width ≤ 30 ns

DC Characteristics (Ta = 0 to +70°C, V_{CC} = 5 V ± 10%, V_{SS} = 0 V)

Parameter	Symbol	Min	Typ ^{*1}	Max	Unit	Test Conditions
Input leakage current	I _{LI}	—	—	1.0	μA	V _{in} = V _{SS} to V _{CC}
Output leakage current	I _{LO}	—	—	1.0	μA	$\overline{CS1} = V_{IH}$ or $CS2 = V_{IL}$ or $\overline{OE} = V_{IH}$ or $\overline{WE} = V_{IL}$, V _{I/O} = V _{SS} to V _{CC}
Operating power supply current: DC	I _{CC}	—	15	30	mA	$\overline{CS1} = V_{IL}$, $CS2 = V_{IH}$, Others = V _{IH} /V _{IL} I _{I/O} = 0 mA
Operating power supply current	I _{CC1} (HM628128A-7/8/10)	—	45	70	mA	Min cycle, duty = 100%, $\overline{CS1} = V_{IL}$, $CS2 = V_{IH}$, Others = V _{IH} /V _{IL} I _{I/O} = 0 mA
	I _{CC1} (HM628128A-5)	—	50	80	mA	
	I _{CC2}	—	15	25	mA	Cycle time = 1 μs, duty = 100%, I _{I/O} = 0 mA, $\overline{CS1} \leq 0.2$ V, $CS2 \geq V_{CC} - 0.2$ V $V_{IH} \geq V_{CC} - 0.2$ V, $V_{IL} \leq 0.2$ V
Standby power supply current: DC	I _{SB}	—	1	2	mA	(1) $\overline{CS1} = V_{IH}$, $CS2 = V_{IH}$ or (2) $CS2 = V_{IL}$
Standby power supply current (1): DC	I _{SB1} (L-version)	—	2	100	μA	0 V ≤ V _{in} ≤ V _{CC} , (1) $\overline{CS1} \geq V_{CC} - 0.2$ V, (2) $CS2 \geq V_{CC} - 0.2$ V or , 0 V ≤ CS2 ≤ 0.2 V
	I _{SB1} (L-SL version)	—	2	50	μA	
Output voltage	V _{OL}	—	—	0.4	V	I _{OL} = 2.1 mA
	V _{OH}	2.4	—	—	V	I _{OH} = −1.0 mA

Note: 1. Typical values are at V_{CC} = 5.0 V, Ta = +25°C and not guaranteed.

Capacitance (Ta = 25°C, f = 1.0 MHz)^{*1}

Parameter	Symbol	Min	Typ	Max	Unit	Test Conditions
Input capacitance	C _{in}	—	—	8	pF	V _{in} = 0 V
Input/output capacitance	C _{I/O}	—	—	10	pF	V _{I/O} = 0 V

Note: 1. This parameter is sampled and not 100% tested.

AC Characteristics ($T_a = 0$ to $+70^{\circ}\text{C}$, $V_{CC} = 5\text{ V} \pm 10\%$, unless otherwise noted.)**Test Conditions**

- Input pulse levels: 0.8 V to 2.4 V (HM628128A-7/8/10)
0 V to 3 V (HM628128A-5)
- Input rise and fall time: 5 ns
- Input and output timing reference levels: 1.5 V
- Output load: 1 TTL Gate and CL (100 pF) (HM628128A-7/8/10)
1 TTL Gate and CL (30 pF) (HM628128A-5) (Including scope & jig)

Read Cycle


		HM628128A									
		-5		-7		-8		-10			
Parameter	Symbol	Min	Max	Min	Max	Min	Max	Min	Max	Unit	Notes
Read cycle time	t_{RC}	55	—	70	—	85	—	100	—	ns	
Address access time	t_{AA}	—	55	—	70	—	85	—	100	ns	
Chip selection to output valid	t_{CO1}	—	55	—	70	—	85	—	100	ns	
	t_{CO2}	—	55	—	70	—	85	—	100	ns	
Output enable to output valid	t_{OE}	—	30	—	35	—	45	—	50	ns	
Chip selection to output in low-Z	t_{LZ1}	5	—	10	—	10	—	10	—	ns	2, 3
	t_{LZ2}	5	—	10	—	10	—	10	—	ns	2, 3
Output enable to output in low-Z	t_{OLZ}	5	—	5	—	5	—	5	—	ns	2, 3
Chip deselection to output in high-Z	t_{HZ1}	0	20	0	25	0	30	0	35	ns	1, 2, 3
	t_{HZ2}	0	20	0	25	0	30	0	35	ns	1, 2, 3
Output disable to output in high-Z	t_{OHZ}	0	20	0	25	0	30	0	35	ns	1, 2, 3
Output hold from address change	t_{OH}	5	—	10	—	10	—	10	—	ns	

Notes: 1. t_{HZ} and t_{OHZ} are defined as the time at which the outputs achieve the open circuit conditions and are not referred to output voltage levels.

2. At any given temperature and voltage condition, t_{HZ} max is less than t_{LZ} min both for a given device and from device to device.

3. This parameter is sampled and not 100% tested.

Read Timing Waveform ($\overline{WE} = V_{IH}$)

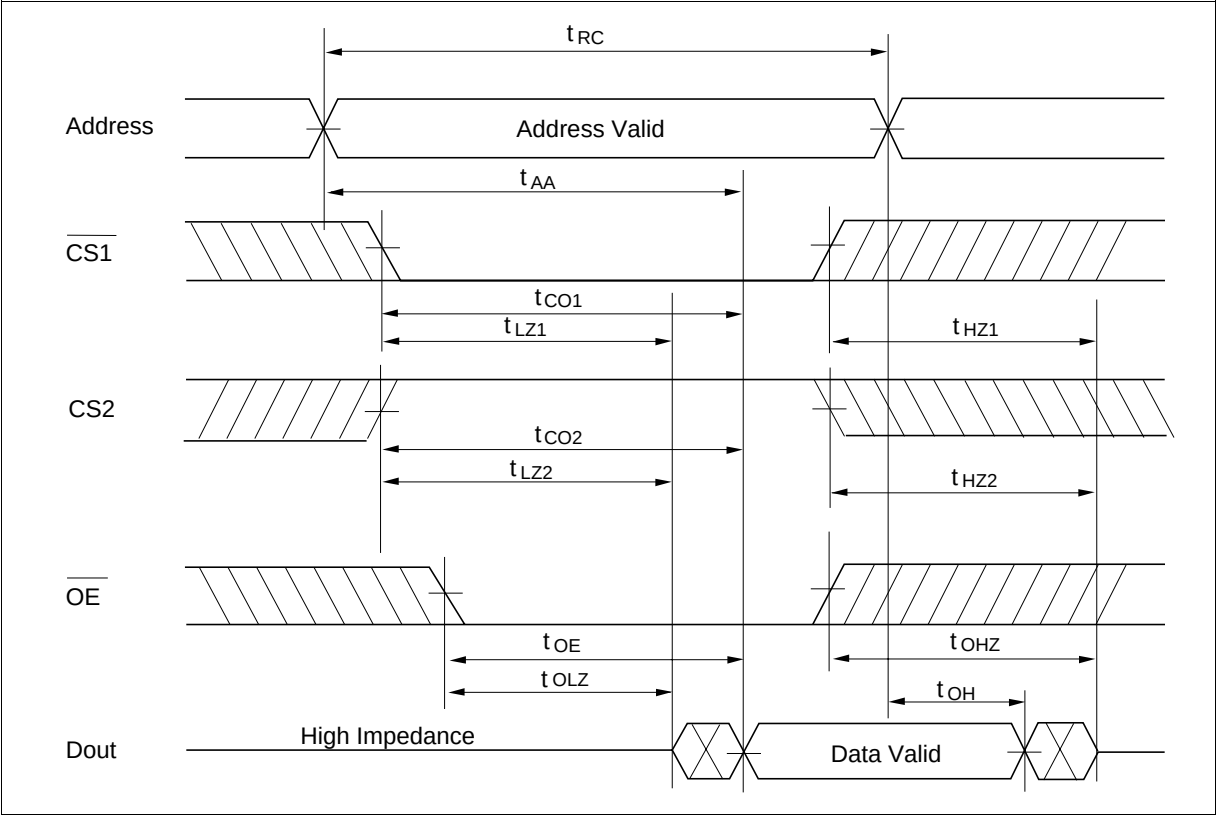


Write Cycle


		HM628128A									
		-5		-7		-8		-10			
Parameter	Symbol	Min	Max	Min	Max	Min	Max	Min	Max	Unit	Notes
Write cycle time	t _{WC}	55	—	70	—	85	—	100	—	ns	
Chip selection to end of write	t _{CW}	50	—	60	—	75	—	80	—	ns	2
Address setup time	t _{AS}	0	—	0	—	0	—	0	—	ns	3
Address valid to end of write	t _{AW}	50	—	60	—	75	—	80	—	ns	
Write pulse width	t _{WP}	40	—	50	—	55	—	60	—	ns	1, 7
Write recovery time	t _{WR}	0	—	0	—	0	—	0	—	ns	4
Write to output in high-Z	t _{WHZ}	0	20	0	25	0	30	0	35	ns	5, 6
Data to write time overlap	t _{DW}	25	—	30	—	35	—	40	—	ns	
Data hold from write time	t _{DH}	0	—	0	—	0	—	0	—	ns	
Output active from end of write	t _{OW}	5	—	5	—	5	—	5	—	ns	6
Output disable to output in High-Z	t _{OHZ}	0	20	0	25	0	30	0	35	ns	5

- Notes: 1. A write occurs during the overlap of a low $\overline{CS1}$, a high CS2, and a low $\overline{WE}$. A write begins at the latest transition among $\overline{CS1}$ going low, CS2 going high, and $\overline{WE}$ going low. A write ends at the earliest transition among $\overline{CS1}$ going high, CS2 going low, and $\overline{WE}$ going high. t_{WP} is measured from the beginning of write to the end of write.
2. t_{CW} is measured from the later of $\overline{CS1}$ going low or CS2 going high to the end of write.
3. t_{AS} is measured from the address valid to the beginning of write.
4. t_{WR} is measured from the earliest of $\overline{CS1}$ or $\overline{WE}$ going high or CS2 going low to the end of write cycle.
5. During this period, I/O pins are in the output state; therefore, the input signals of the opposite phase to the outputs must not be applied.
6. This parameter is sampled and not 100% tested.
7. In the write cycle with $\overline{OE}$ low fixed, t_{WP} must satisfy the following equation to avoid a problem of data bus contention. $t_{WP} \geq t_{DW} \text{ min} + t_{WHZ} \text{ mix}$

Write Timing Waveform (1) ($\overline{\text{OE}}$ Clock)

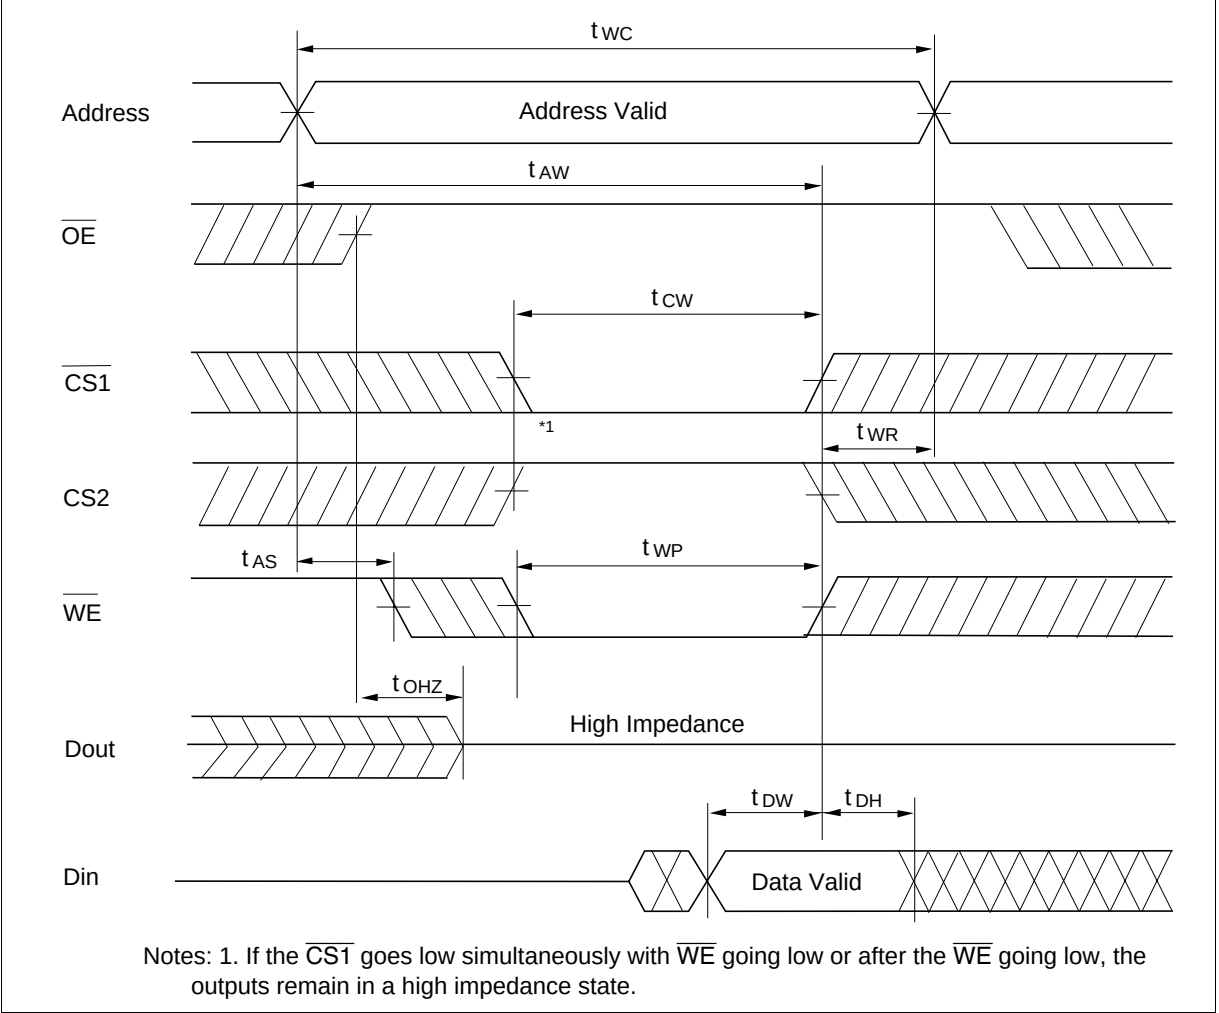

Write Timing Waveform (2) ($\overline{\text{OE}}$ low Fixed)

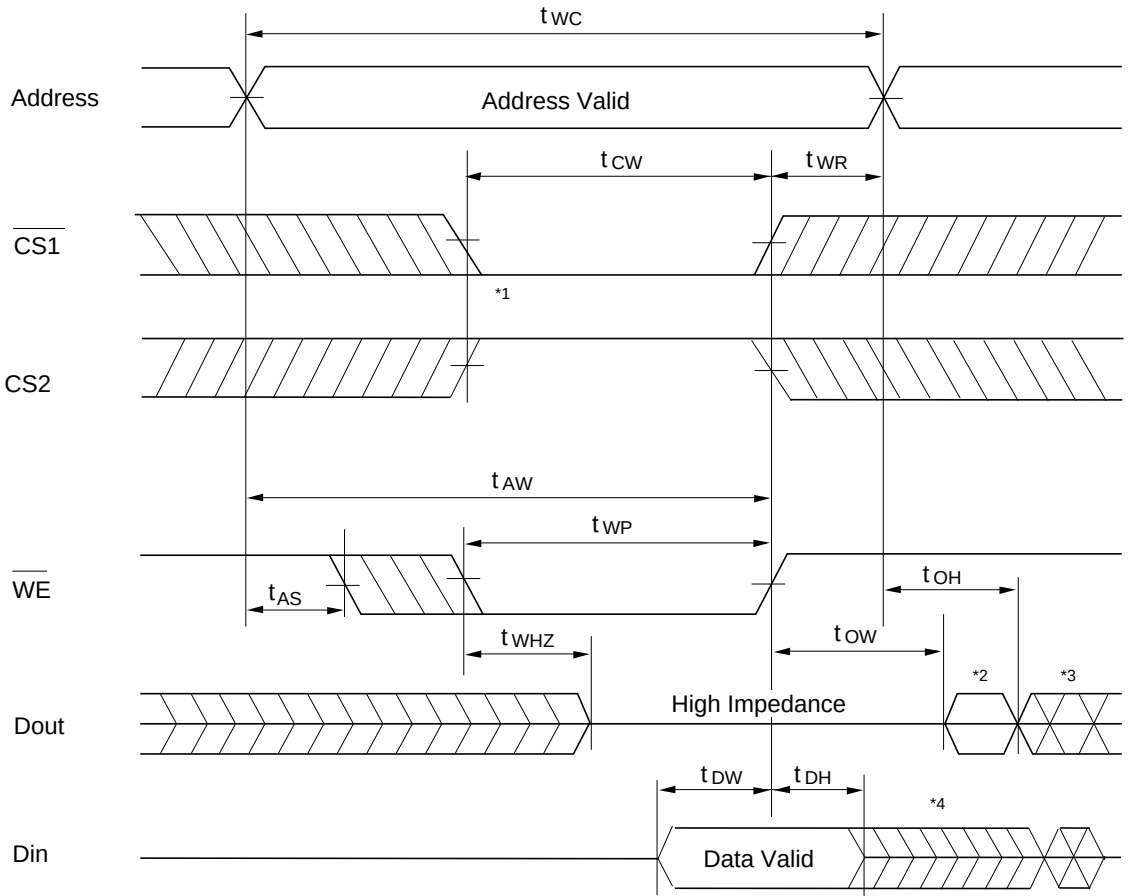


- Notes:
1. If the $\overline{\text{CS1}}$ goes low simultaneously with $\overline{\text{WE}}$ going low or after the $\overline{\text{WE}}$ going low, the outputs remain in a high impedance state.
 2. Dout is the same phase of the latest written data in this write cycle.
 3. Dout is the read data of next address.
 4. If $\overline{\text{CS1}}$ is low and CS2 high during this period, I/O pins are in the output state. Therefore, the input signals of opposite phase to the outputs must not be applied to them.

Low V_{CC} Data Retention Characteristics (Ta = 0 to +70°C)


Parameter	Symbol	Min	Typ	Max	Unit	Test Conditions ³
V _{CC} for data retention	V _{DR}	2.0	—	—	V	$\overline{CS1} \geq V_{CC} - 0.2\text{ V}$, $CS2 \geq V_{CC} - 0.2\text{ V}$ or $0\text{ V} \leq CS2 \leq 0.2\text{ V}$ $V_{in} > 0\text{ V}$
Data retention current	I _{CCDR} (L-version)	—	1	50 ¹	μA	$V_{CC} = 3.0\text{ V}$, $V_{in} \geq 0\text{ V}$ $\overline{CS1} \geq V_{CC} - 0.2\text{ V}$ $CS2 \geq V_{CC} - 0.2\text{ V}$ or $0\text{ V} \leq CS2 \leq 0.2\text{ V}$
	I _{CCDR} (L-SL version)	—	1	15 ²	μA	
Chip deselect to data retention time	t _{CDR}	0	—	—	ns	See retention waveform
Operation recovery time	t _R	5	—	—	ms	

Notes: 1. 20 μA max at Ta = 0 to 40°C (L-version).
2. 3 μA max at Ta = 0 to 40°C (L-SL-version).
3. CS2 controls address buffer, $\overline{WE}$ buffer, $\overline{CS1}$ buffer, $\overline{OE}$ buffer, and Din buffer. If CS2 controls data retention mode, Vin levels (address, $\overline{WE}$, $\overline{OE}$, $\overline{CS1}$, I/O) can be in the high impedance state. If $\overline{CS1}$ controls data retention mode, CS2 must be $CS2 \geq V_{CC} - 0.2\text{ V}$ or $0\text{ V} \leq CS2 \leq 0.2\text{ V}$. The other input levels (address, $\overline{WE}$, $\overline{OE}$, I/O) can be in the high impedance state.

Low V_{CC} Data Retention Timing Waveform (1) ($\overline{CS1}$ Controlled)

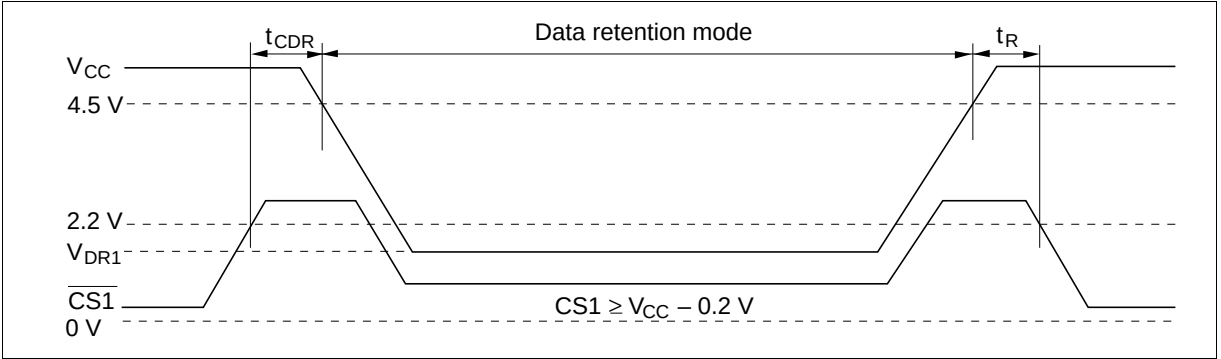

Low V_{CC} Data Retention Timing Waveform (2) (CS2 Controlled)

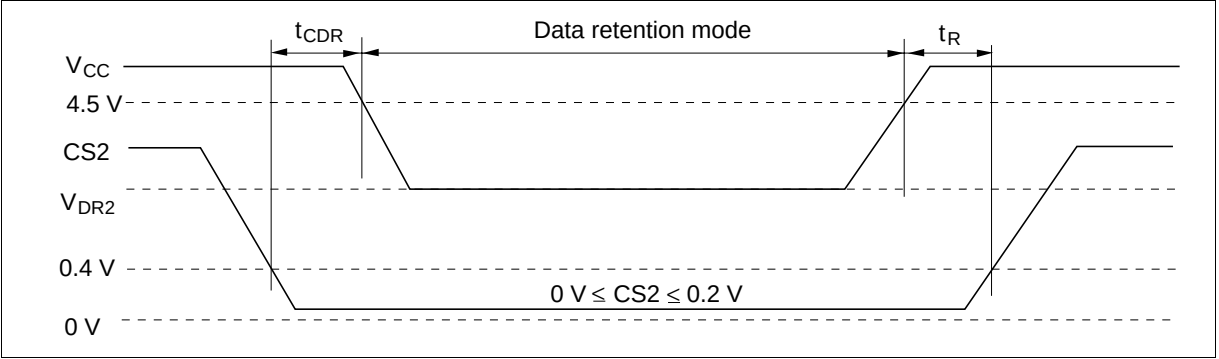


HM628128A Series

Package Dimensions


HM628128ALP Series (DP-32)

Unit: mm

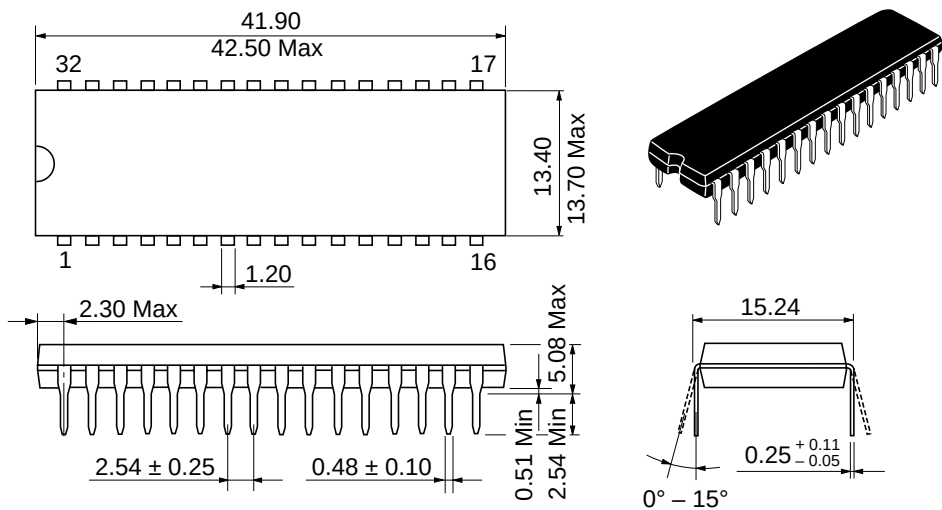


HM628128ALFP Series (FP-32D)

Unit: mm

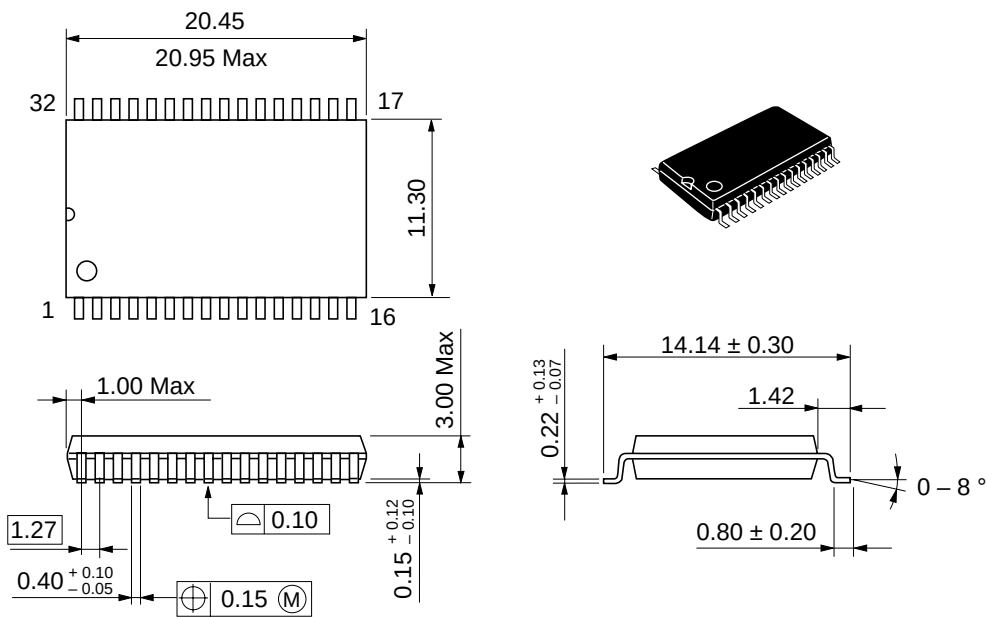

HM628128ALT Series (TFP-32D)

Unit: mm

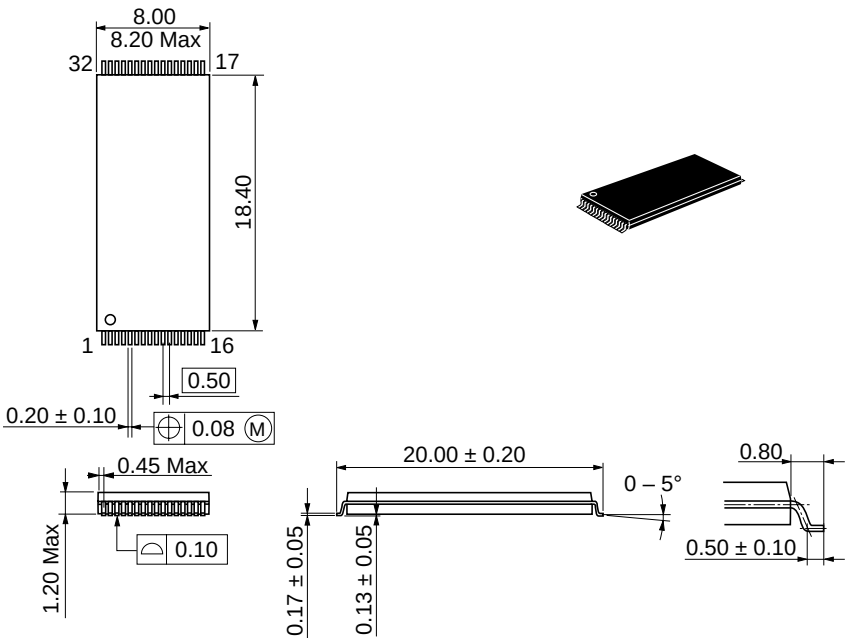

HM628128ALR Series (TFP-32DR)

Unit: mm

